
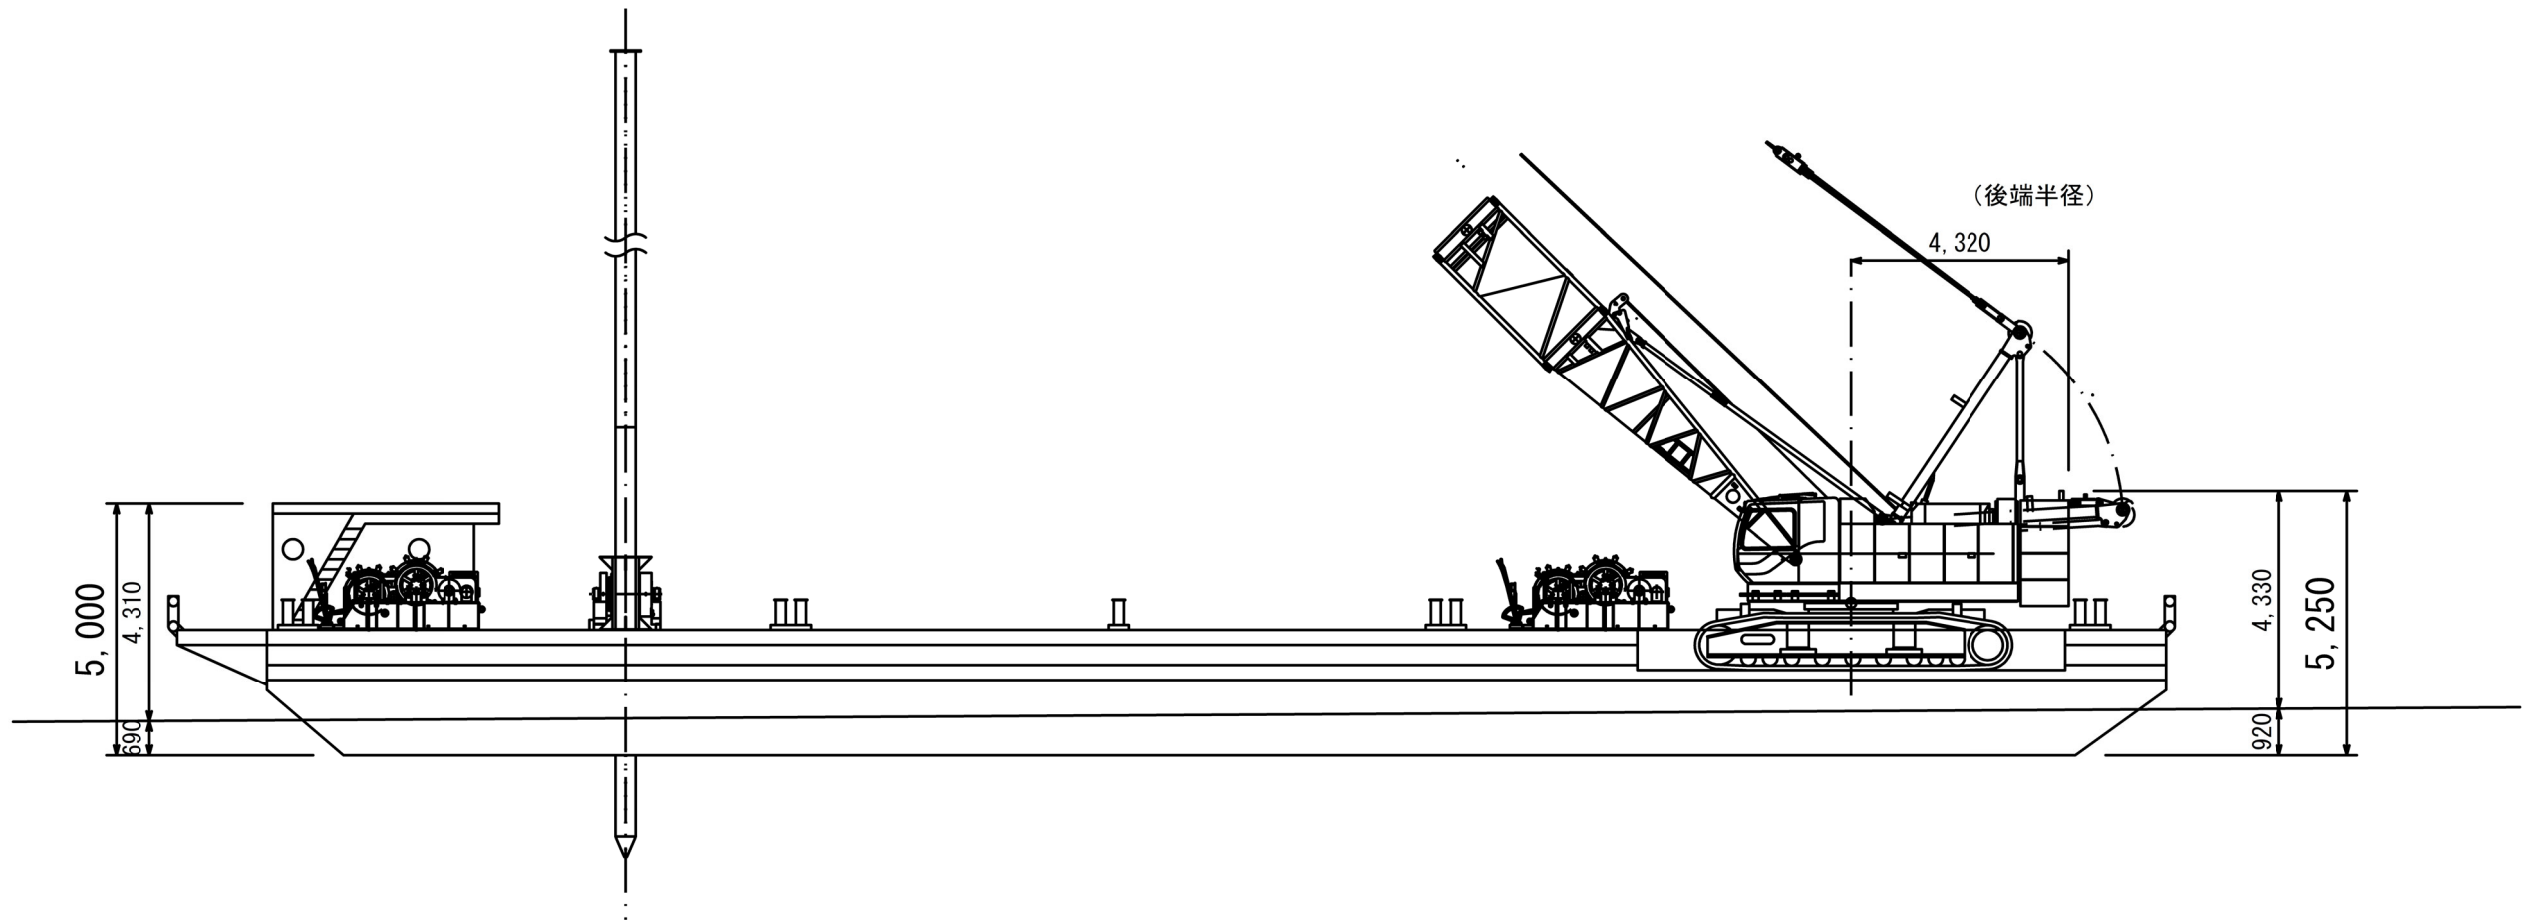


第二富士 90 t 吊クレーン付台船

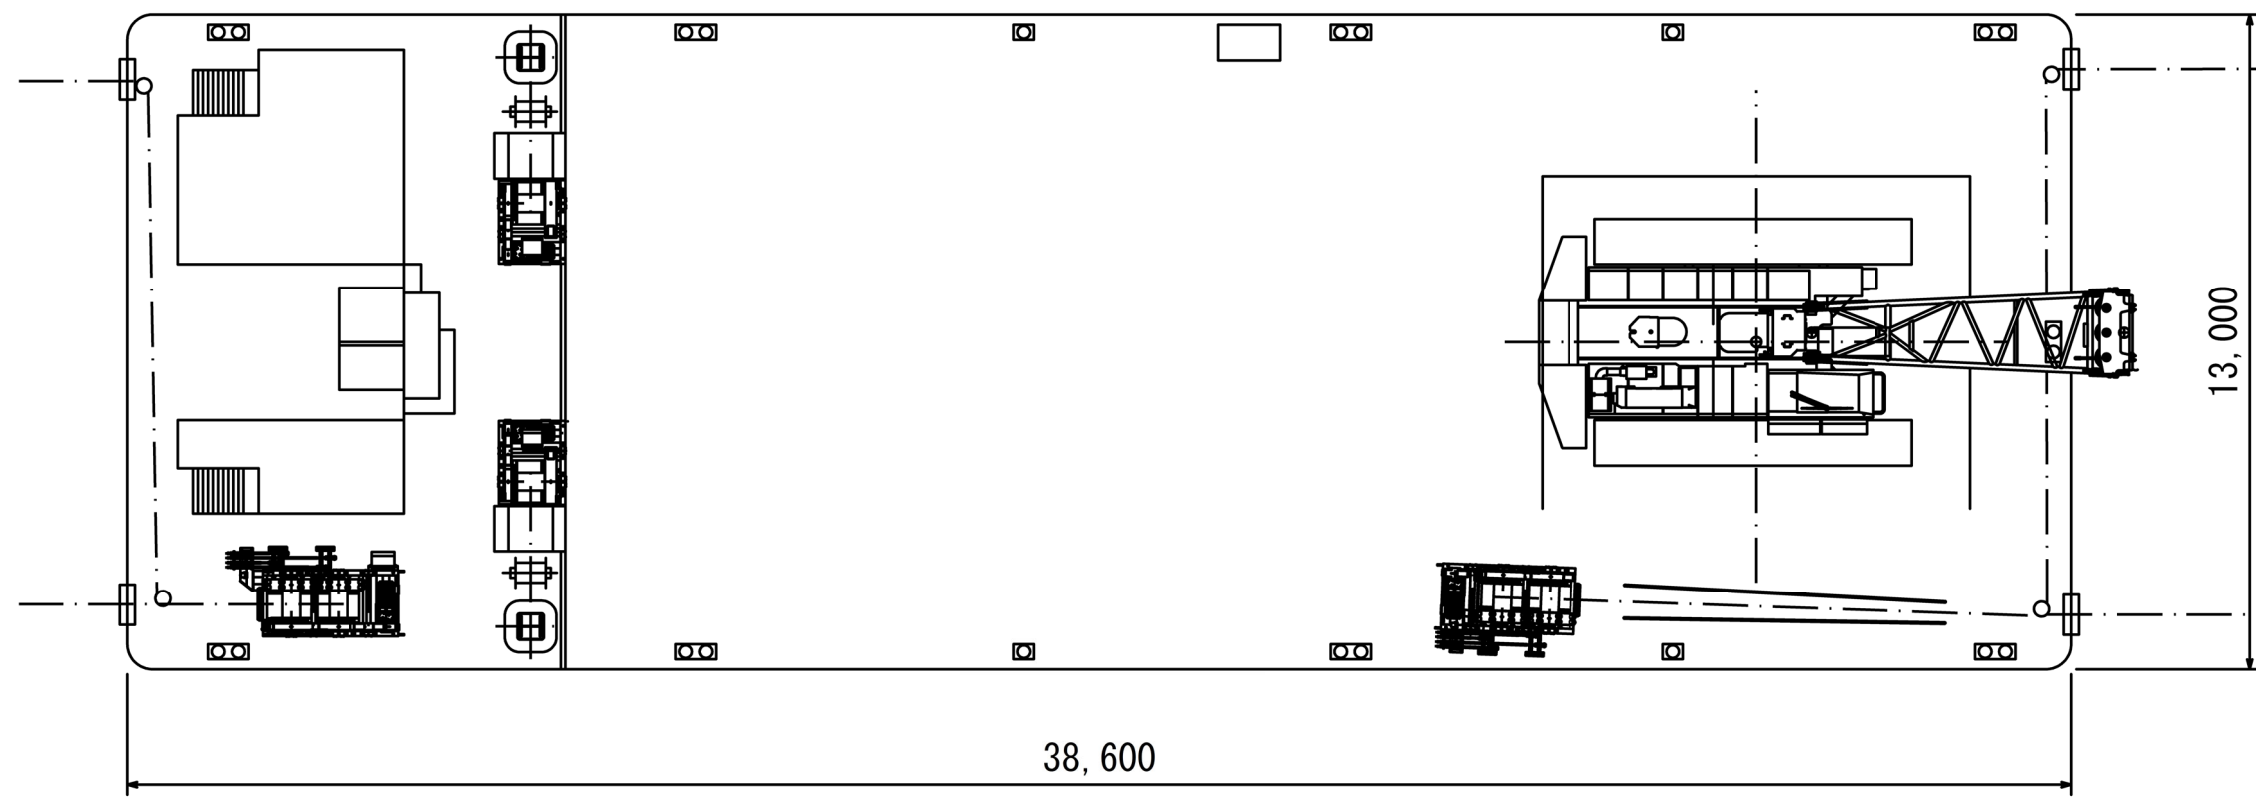

第二富士 定格総荷重表

定格総荷重表

種類および型式		7090G クローラクレーン型 ジブ																	単位: t	
ジブの長さ		13.8m	16.9m	19.9m	23.0m	26.0m	29.1m	32.1m	35.2m	38.2m	41.2m	44.3m	47.3m	50.4m	53.4m	56.5m	59.5m	62.6m	ジブの長さ	
作業半径 (m)	4.3	90.0	87.5	4.8m / 74.1															4.3	作業半径 (m)
	5.0	70.9	70.8	70.7	3.4m / 64.9	5.9m / 56.4													5.0	
	6.0	55.1	55.0	55.0	54.9	54.8	6.4m / 50.2												6.0	
	7.0	44.4	44.3	44.1	44.1	44.0	44.0	43.9	7.5m / 39.6										7.0	
	8.0	36.6	36.5	36.3	36.2	36.1	36.1	36.0	35.9	35.7	8.5m / 32.5								8.0	
	9.0	31.0	30.9	30.7	30.7	30.5	30.5	30.4	30.3	30.2	30.2	9.1m / 29.7	9.6m / 27.2						9.0	
	10.0	26.9	26.7	26.6	26.5	26.4	26.3	26.3	26.1	26.0	26.0	25.8	25.7	10.1m / 22.0	10.7m / 22.0	11.2m / 21.6	11.7m / 20.1		10.0	
	12.0	21.1	21.0	20.8	20.7	20.6	20.5	20.4	20.3	20.2	20.1	20.0	19.8	19.8	19.7	19.5	19.4	12.2m / 18.0	12.0	
	14.0	13.2m / 18.7	17.1	16.9	16.9	16.7	16.6	16.6	16.4	16.3	16.2	16.1	16.0	15.9	15.8	15.6	15.5	15.4	14.0	
	16.0		15.8m / 14.6	14.2	14.1	14.0	13.9	13.8	13.7	13.5	13.5	13.3	13.2	13.2	13.0	12.9	12.7	12.6	16.0	
	18.0			12.2	12.1	11.9	11.9	11.8	11.6	11.5	11.4	11.2	11.1	11.1	10.9	10.8	10.7	10.5	18.0	
	20.0			18.5m / 11.8	10.5	10.4	10.3	10.2	10.0	9.9	9.8	9.6	9.5	9.5	9.3	9.2	9.1	8.9	20.0	
	22.0				21.1m / 9.8	9.1	9.0	8.9	8.7	8.6	8.5	8.4	8.2	8.2	8.0	7.9	7.8	7.6	22.0	
	24.0					23.8m / 8.2	8.0	7.9	7.7	7.6	7.5	7.3	7.2	7.1	7.0	6.9	6.7	6.6	24.0	
	26.0						7.2	7.0	6.8	6.7	6.6	6.5	6.3	6.3	6.1	6.0	5.8	5.7	26.0	
	28.0						26.4m / 7.0	6.3	6.1	6.0	5.9	5.7	5.6	5.5	5.4	5.2	5.1	4.9	28.0	
	30.0							29.0m / 6.0	5.5	5.4	5.3	5.1	5.0	4.9	4.7	4.6	4.5	4.3	30.0	
	32.0								31.7m / 5.1	4.8	4.8	4.6	4.4	4.4	4.2	4.1	3.9	3.8	32.0	
	34.0									4.4	4.3	4.1	4.0	3.9	3.7	3.6	3.4	3.2	34.0	
	36.0									34.3m / 4.3	3.9	3.7	3.5	3.5	3.3	3.2	3.0	2.7	36.0	
	38.0										37.0m / 3.7	3.3	3.2	3.1	2.9	2.7	2.5	2.3	38.0	
	40.0											39.6m / 3.1	2.9	2.8	2.5	2.3	2.1	1.9	40.0	
	42.0												2.5	2.4	2.2	2.0	1.8	1.5	42.0	
	44.0													42.2m / 2.5	2.1	1.8	1.5		44.0	
	46.0														44.9m / 2.0	1.6			46.0	
最大ジブ角度		78°	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°	最大ジブ角度	標準掛数
最小ジブ角度		30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	33°	41°	44°	49°	最小ジブ角度	
標準掛数		8	8	7	6	6	5	4	4	4	3	3	3	2	2	2	2	2	標準掛数	

内の定格総荷重は強度域である。